


Depth Adaptive Diffusion



Pock, et al.: "A convex formulation of continuous multi-label problems," *ECCV 2008*

- ▶ General idea: From two rectified stereo images we compute a depth map. Then we run a diffusion on the image, where the diffusion tensor depends on the depth.
- ▶ What to do:
 1. Implement stereo matching using a functional lifting approach.
(\Rightarrow Paper)
 2. Diffuse the image depending on the result.
 3. Generate nice results.

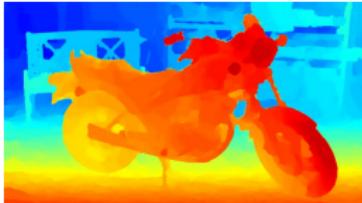


Depth Adaptive Diffusion



Pock, et al.: "A convex formulation of continuous multi-label problems," *ECCV 2008*

- ▶ General idea: From two rectified stereo images we compute a depth map. Then we run a diffusion on the image, where the diffusion tensor depends on the depth.
- ▶ What to do:
 1. Implement stereo matching using a functional lifting approach.
(⇒ *Paper*)
 2. Diffuse the image depending on the result.
 3. Generate nice results.

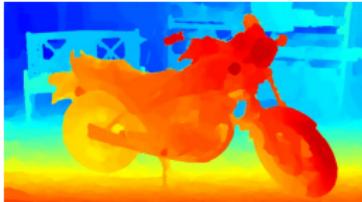

Depth Adaptive Diffusion



Pock, et al.: "A convex formulation of continuous multi-label problems," *ECCV 2008*

- ▶ General idea: From two rectified stereo images we compute a depth map. Then we run a diffusion on the image, where the diffusion tensor depends on the depth.
- ▶ What to do:
 1. Implement stereo matching using a functional lifting approach.
(⇒ *Paper*)
 2. Diffuse the image depending on the result.
 3. Generate nice results.

